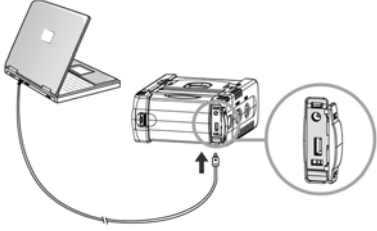

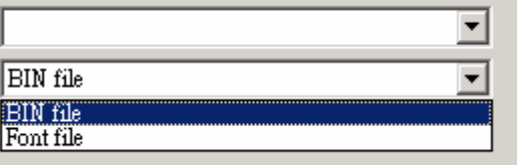

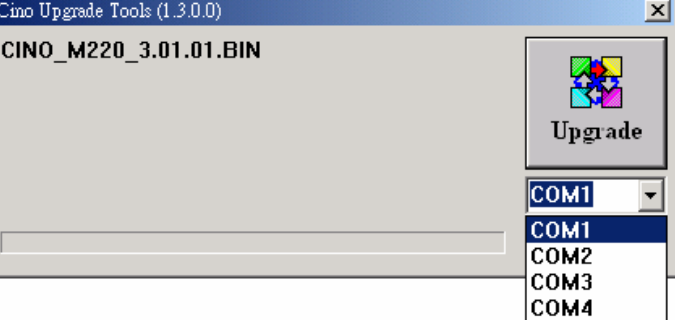
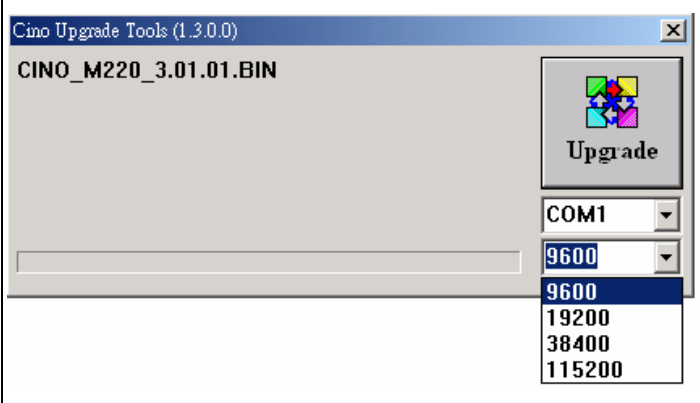
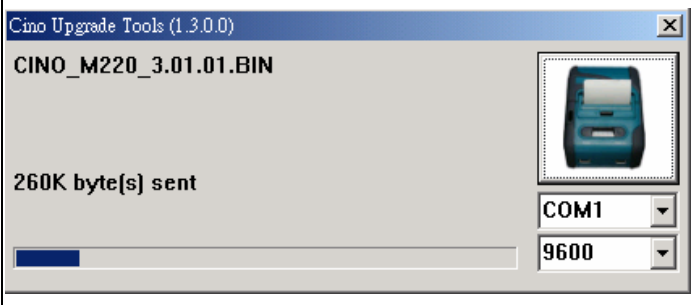
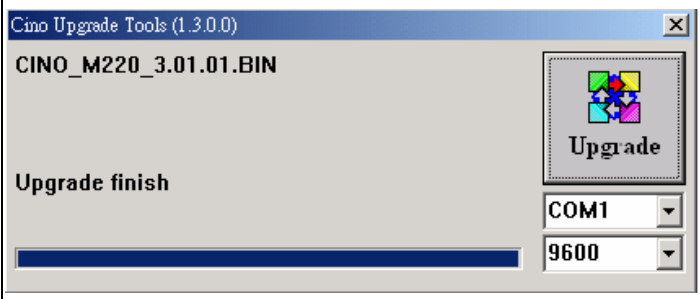


## Mobile Printer Upgrade Tool Instruction

Thank you for choosing Cino VersaJet Micro2 Series Mobile Printer. The Firmware and Fonts can be upgraded and installed by RS232 serial or Bluetooth interface. Please follow the below instructions step by step to upgrade the Firmware or Font.

### Firmware upgrade

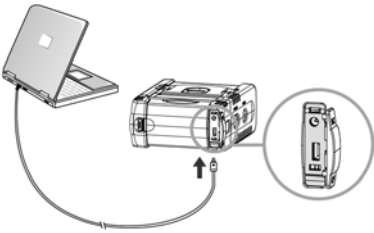

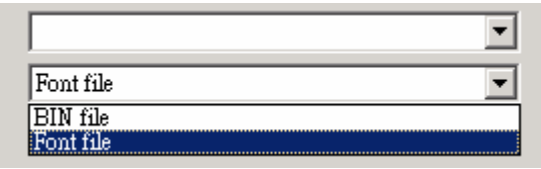

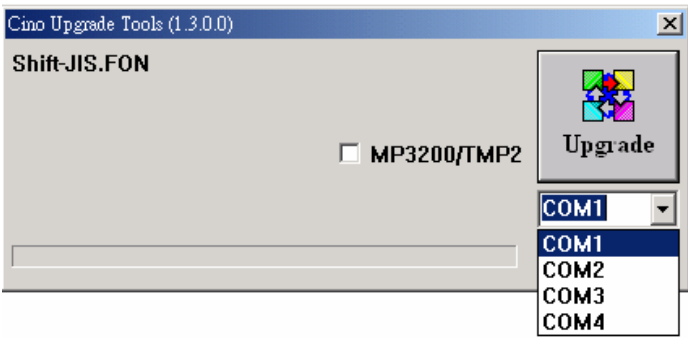
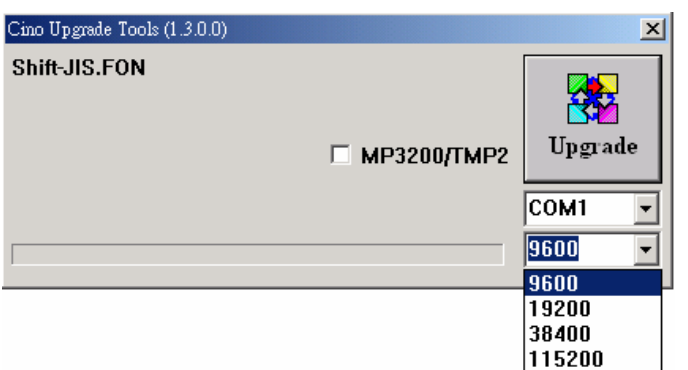
	<p>Plug the connector of RS232 cable into the Host Interface Connector of the printer</p> <p><i>Note: If the Bluetooth interface will be used for firmware upgrade, please establish the Bluetooth connection with the printer firstly.</i></p>
	<p>Double click <b>myupgrade</b> to open the upgrade tool</p>
	<p>Select <b>BIN</b> file from the File Type drop-down list</p>
	<p>Select the firmware file and click <b>Open</b></p>
	<p>Select the appropriate <b>COM</b> port</p>

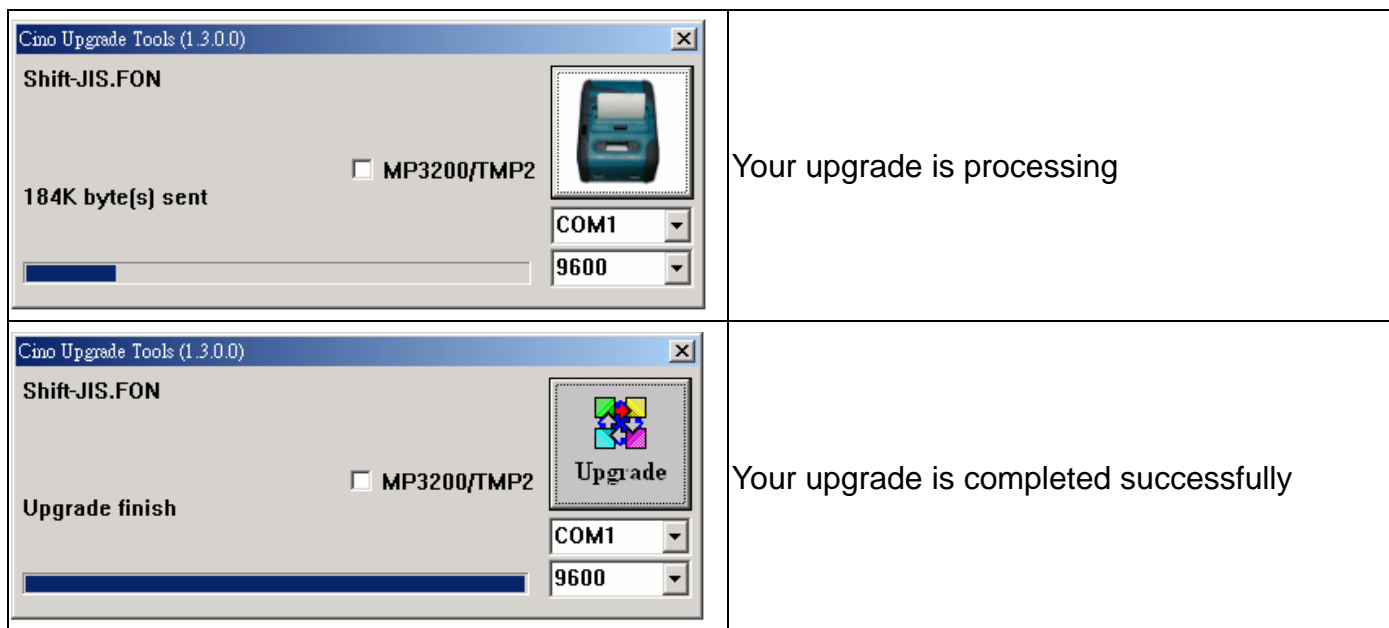
 <p>Cino Upgrade Tools (1.3.0.0) CINO_M220_3.01.01.BIN</p> <p>Upgrade</p> <p>COM1</p> <p>9600</p> <p>9600 19200 38400 115200</p>	<p>Select the appropriate <b>Baud Rate</b> and click <b>Upgrade</b> to start the upgrade procedure</p>
 <p>Cino Upgrade Tools (1.3.0.0) CINO_M220_3.01.01.BIN</p> <p>260K byte(s) sent</p> <p>COM1</p> <p>9600</p>	<p>Your upgrade is processing</p>
 <p>Cino Upgrade Tools (1.3.0.0) CINO_M220_3.01.01.BIN</p> <p>Upgrade</p> <p>COM1</p> <p>9600</p> <p>Upgrade finish</p>	<p>Your upgrade is completed successfully</p>



1. It is necessary to **re-install** the 2-type Font after upgrade the 3.01.01 or 3.01.01 above firmware version.
2. If you want to downgrade the firmware to 3.00.02 version, please use old version upgrade tool.
3. When the upgrade procedure is completed, your printer will turn-off automatically. Please conduct the self-test by press **FEED** and **POWER** together to confirm your firmware revision is correct.

## Fonts Installation

	<p>Plug the connector of RS232 cable into the Host Interface Connector of the printer</p> <p><i>Note: If the Bluetooth interface will be used for font installation, please establish the Bluetooth connection with the printer firstly.</i></p>
	<p>Double click <b>myupgrade</b> to open the upgrade tool</p>
	<p>Select <b>Font</b> file from the File Type drop-down list</p>
	<p>Select your desired Font file and click <b>Open</b></p>
	<p>Select the appropriate <b>COM</b> port</p>
	<p>Select the appropriate <b>Baud Rate</b> and click <b>Upgrade</b> to start the upgrade procedure</p>



- ⚠ 1. Please do **not** click **MP3200/TMP2** when you conduct the Fonts Installation.
- 2. Never disconnect RS232 cable from your printer when the upgrade is processing, the disconnection may cause the damage to the printer.

📄 Except the default English Font, only one additional Font can be installed into the printer. Please refer to the following table for Multilingual 2-byte Fonts.

Fonts	Multilingual 2-byte Font
NONE	No additional Font
Shift-JIS	Japanese Font
STDFONT	Traditional Chinese Font
GB2312	Simplified Chinese Font